

XCU Compact

Rugged full-HD stainless-steel IP camera

Quick Start Guide



Find additional manuals, the datasheet, the EU Declaration of Conformity, and the latest firmware for this product at:

siqura.com/downloads/software



Unpack



- 1x Camera unit
- 1x Quick Start Guide

Note 1: Subject to modification. Actual product and accessories may differ in appearance.

Mount



Wall mounted XCU Compact



XCU Compact ceiling mounted on XCUCM01



XCU Compact ceiling mounted on XCUCM02




XCU Compact wall/pole mounted on XCUCM02

Note 2: For detailed mounting instructions, download the installation manual.


Note 3: The silica gel packet inside the camera must be replaced if the camera has been opened.

Connect and point

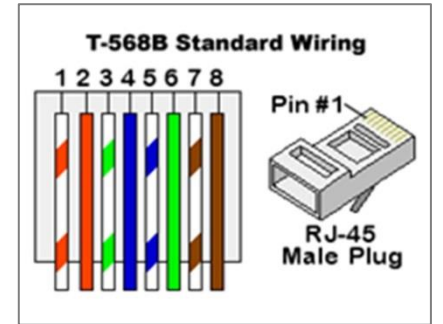


Connect to Power over Ethernet (standard connection)

Assign IP address with DHCP...

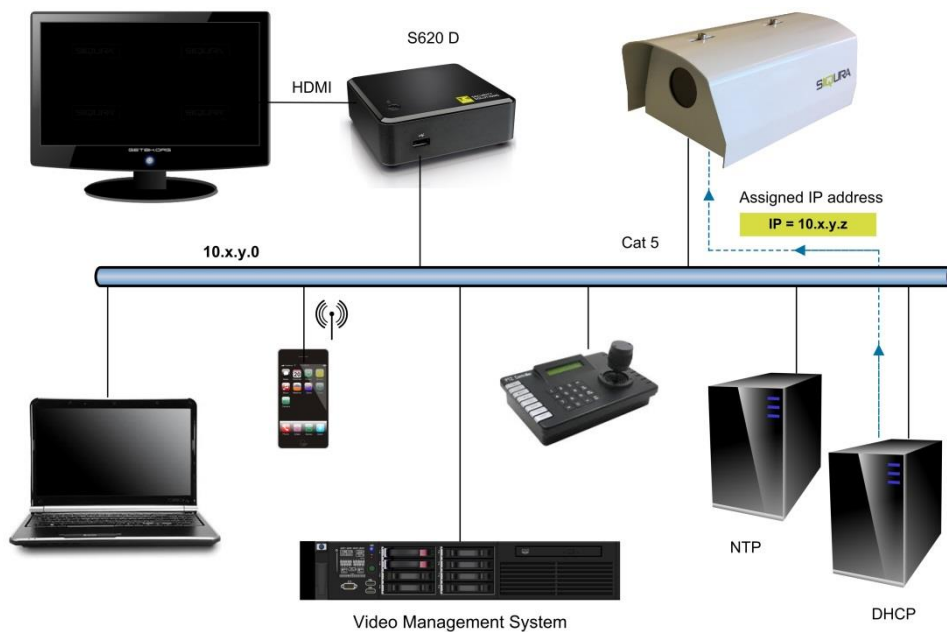

.. or assign IP address without DHCP

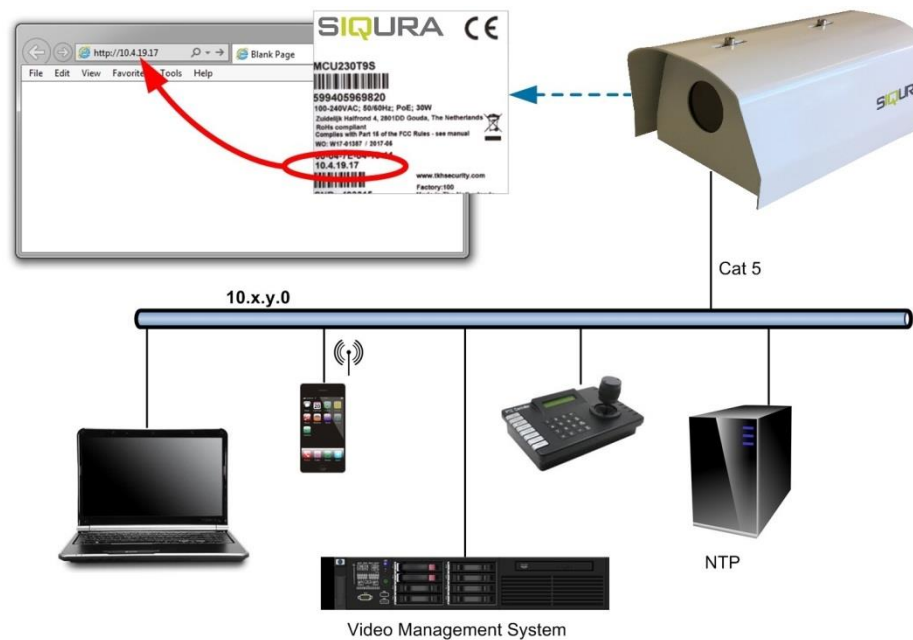

Install Device Manager



Note 4: On the Siqura website, choose SDM2 2.5.1 installer or higher.

Change network settings

The screenshot shows the SDM2 Device Manager interface with a list of devices. A mouse cursor is shown clicking on the 'Change network settings...' option in the context menu. Below, the 'Edit network settings' dialog box is shown with the following fields:

- Input instructions: DHCP Enabled
- IP Address: 172.22.232.88
- Subnet mask: 255.255.0.0
- Default gateway: 172.22.0.1

Upgrade firmware



IMPORTANT: FOR BEST PERFORMANCE AND NETWORK SECURITY, MAKE SURE TO DOWNLOAD THE LATEST FIRMWARE VERSION FROM SIQURA.COM. THEN, UPGRADE THE FIRMWARE IN THE DEVICE MANAGER (SEE BELOW).

The screenshot shows the SDM2 Device Manager interface with a list of devices. A mouse cursor is shown clicking on the 'Firmware upgrade...' option in the context menu. Below, a file explorer window shows a folder named 'Firmware' containing several files.

Create Admin account

The screenshot shows the SIQURA User Management interface. A mouse cursor is shown clicking on the 'Add user' button. Below, the user creation form is shown with the following fields:

Name	Password	Role
Admin	Admin



IMPORTANT: MAKE SURE YOU CREATE AN ADMIN ACCOUNT WHEN YOU OPEN THE WEB INTERFACE FOR THE FIRST TIME. TO KEEP THE ACCOUNT SAFE, SET A STRONG, COMPLEX PASSWORD. THIS HELPS TO PREVENT UNAUTHORISED ACCESS.



Set a strong password!

qwerty1234



x6W@oM0a!9#F



View live video via browser

The screenshot shows the SIQURA Live Stream interface. A mouse cursor is shown clicking on the 'Live Stream' menu item. Below, a live video feed is shown.

Change image settings

The screenshot shows the SIQURA Image Settings interface. A mouse cursor is shown clicking on the 'Image Settings' menu item. Below, the 'Exposure' settings are shown:

- Exposure mode: Auto
- Minimum shutter time: 1/10000 s
- Auto slow shutter: Enable
- Maximum auto gain: 46 dB
- EV compensation: 0 dB
- Wide dynamic range: Enable
- Backlight compensation: Enable

View video stream in video player

The screenshot shows a video player displaying a live video stream. Below the player, the URL is shown:

rtsp://10.0.231.156/VideoInput/1/h264/1

The URL components are explained as follows:

- 10.0.231.156: camera IP address
- 1: video input number (1 = optical input, 2 = thermal input)
- h264: media type
- 1: video encoder number