

AMGPSU-I48-P480 INDUSTRIAL DIN-RAIL 480W POWER SUPPLY



Industrial Power Solutions

AMG's industrial DIN-Rail 480W power supplies provide reliable power for AMG PoE based products and ensure stable equipment operation over a wide temperature range. They are suitable for all AMG PoE products (depending on voltage).



PSU 480W 48V	Contacts 1x DC OK	Temp -30~+70°C	Mounting DIN

[AMGPSU-I48-P480]

/ OVERVIEW

Designed in an ultra slim, robust DIN rail housing, the AMGPSU-I48-P480 series industrial power supplies are ideally suited for powering AMG PoE Ethernet equipment. Its wide operating temperature range ensures reliable operation in harsh environments.

Available in a 48-55V output version ensures the power supply is suitable for any PoE requirement.

The power supply offers a high level of stability and immunity to noise and a low ripple for best in class performance.

Compliant to the international IEC62368 standards for EMC and are safety approved to IEC/EN61000-4, CISPR32, EN55032, UL508, IEC62368 and EN62368.

A wide voltage input range that features dual-use inputs for both DC and AC voltages that support 85-264V_{AC} or 120-370V_{DC} ensures the widest possible site support.

A range of other output power levels are available within the AMGPSU product range.

/ FEATURES

- Ultra slim size – ideal for confined spaces, including camera poles and roadside cabinets
- -30°C to +70°C temperature maintains performance in harsh conditions
- DIN rail mountable – quick to install and remove for maintenance
- High efficiency - up to 94% typical
- Universal 85-264V_{AC} or 120-370V_{DC} input range
- Output short circuit, over-current and over-voltage protection included as standard
- High I/O isolation test voltage up to 3000V_{AC}
- Built-in active Power Factor Correction (PFC) function
- 125% peak load output for 3 seconds
- EN62368 & UL safety approved
- AMG 3 Year Support Warranty

Specifications.

Input.

Characteristics	Operating Conditions	Min.	Typ.	Max.	Unit
Input Voltage Range	AC Input	85	-	264	VAC
	DC Input	120	-	370	VDC
Input Frequency		47	-	63	Hz
Input Current	115VAC	-	-	5	A
	230VAC	-	-	2.5	
Inrush Current	115VAC Cold Start	-	20	-	
	230VAC Cold Start	-	40	-	
Power Factor	115VAC	-	0.99	-	-
	230VAC	-	0.95	-	
Leakage Current	264VAC	<0.8mA			
Connector	3-Way Screw Terminal				

Output.

Characteristics	Operating Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy	Full Load Range	-	±1	-	%
Line Regulation	Rated Load	-	±0.5	-	
Load Regulation	0% - 100% Load	-	±1	-	
Output Ripple & Noise*	20MHz Bandwidth (peak-to-peak value)	-	-	120	mV
Stand-by Power Consump.		-	2	-	W
Short Circuit Protection	Recovery time <10s after the short circuit disappears	Hiccup, Continuous, Self-Recovery			
Over-Current Protection	230VAC Rated Load, Normal/High Temp	110%-150% Io, Hiccup, Self-Recovery			
	230VAC Rated Load, Low Temp	≥105% Full Load After Derating, Self-Recovery			
Over-Voltage Protection		56-60V (Output Voltage Turn Off, Self-Recovery)			
Over-Temperature Protect	230VAC, 100% Load	60	-	90	°C
Minimum Load		0	-	-	%
Start-up Delay Time	230VAC	-	300	1000	ms
Hold-up Time		16	22	-	ms
DC OK Relay Output	Normally Closed (Open With DC Fault)	30VDC @ 1A Max			
Connector	5-Way Screw Terminal				

Note: *The "tip and barrel method" is used for ripple and noise test, output parallel 47µF electrolytic capacitor and 0.1µF ceramic capacitor.

Specifications.

General.

Characteristics		Operating Conditions	Min.	Typ.	Max.	Unit
Isolation Test	Input-Earth	Electric Strength Test for 1 min., (leakage current <15mA)	2000	-	-	VAC
	Input-Output		3000	-	-	
	Output-Earth		500	-	-	
Insulation Resistance	Input-Earth	At 500 VDC	100	-	-	M Ω
	Input-Output		100	-	-	
	Output-Earth		100	-	-	
Operating Temperature			-30	-	+70	°C
Storage Temperature			-40	-	+85	
Operating Humidity		Non-Condensing	20	-	90	%RH
Storage Humidity			10	-	95	
Switching Frequency			-	100	-	kHz
Operating Temperature Power Derating		+50°C to +70°C	2.5	-	-	%/°C
Input Voltage Derating		85VAC to 100VAC	1	-	-	%/VAC
Safety Standard			IEC/EN/UL62368 UL61010, UL508			
Safety Class			Class I			
MTBF		MIL-HDBK-217F @ 25°C	>300,000 hours			



Mechanical.

Case Material	Aluminium
Dimensions	125 × 48 × 132 mm (4.92 × 1.89 × 5.20 in) (H x W x D)
Weight	0.98 Kg
Cooling	Free Air Convection


Regulatory.

Emissions	CE	CISPR32/EN55032 Class B
	RE	CISPR32/EN55032 Class B
	Harmonic Current	IEC/EN61000-3-2 Class A & Class D
Immunity	ESD	IEC/EN 61000-4-2 (Contact ±6KV / Air ±8KV)
	RS	IEC/EN 61000-4-3 (10V/m)
	EFT	IEC/EN 61000-4-4 (±2KV)
	Surge	IEC/EN 61000-4-5 (Line - Line ±2KV, Line - GND ±4KV)
	CS	IEC/EN 61000-4-6 (10V r.m.s)
	Voltage Dips, Short Interruptions and Voltage Variations Immunity	IEC/EN 61000-4-11 (0%, 70%)

Product Characteristic Curve.

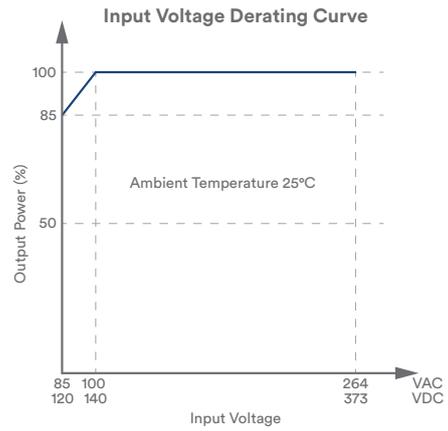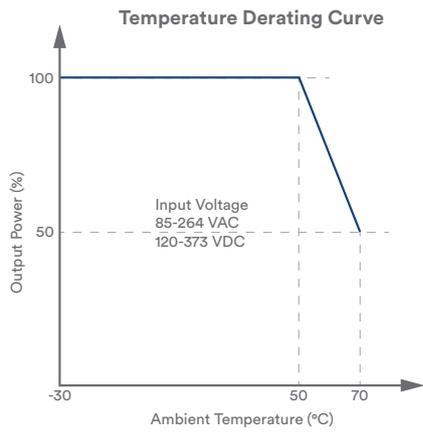

Product Dimensions.

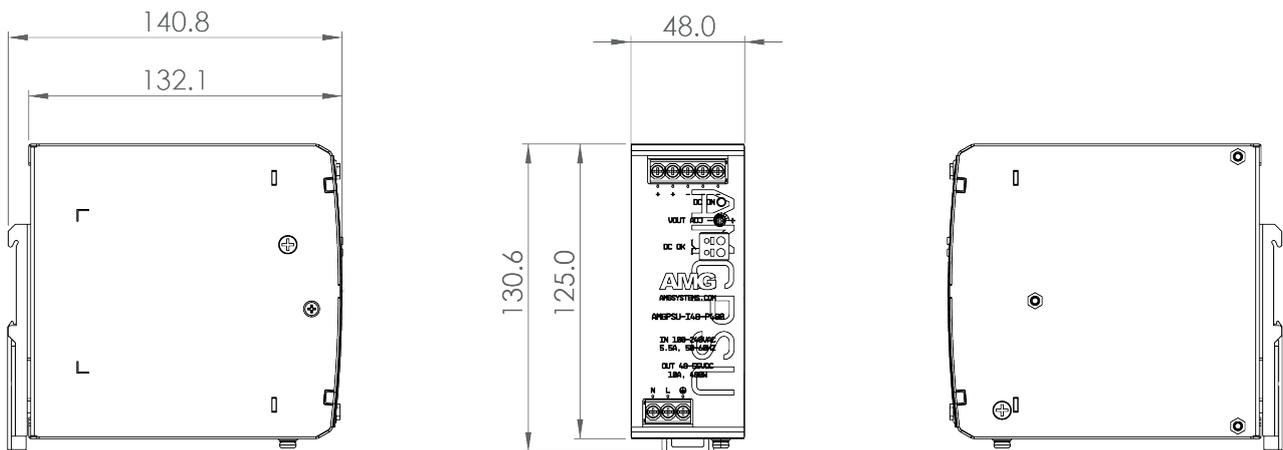

Part Numbers.

480W Industrial DIN-Rail Power Supplies

AMGPSU-I48-P480

Industrial DIN Rail Power Supply, 48V Nominal Output (48-55V Adjustable), 480W (10A)

Notes.

Unless otherwise specified, parameters in this datasheet were measured under the conditions of $T_a=25^\circ\text{C}$, humidity <75% RH with nominal input voltage and rated output load.

In a continuing effort to improve and advance technology, product specifications are subject to change without notice. Please visit www.amgsystems.com for the latest product specifications.