



### Features

#### Mini size

- 0.2kg / 0.54lb
- 120 x 64 x 24mm / 4.72" x 2.52" x 0.94"

#### Easy to install


- Built-in Web Server, easy to manage and configure

#### Abundant functions and features

- H.264 high profile video codec, saves up to 30% bandwidth and storage
- Dual-stream
- TF card slot, supports Automatic Network Replenishment (ANR)
- Bi-directional audio / alarm in and out / RS485

### Dimensions

Unit: mm

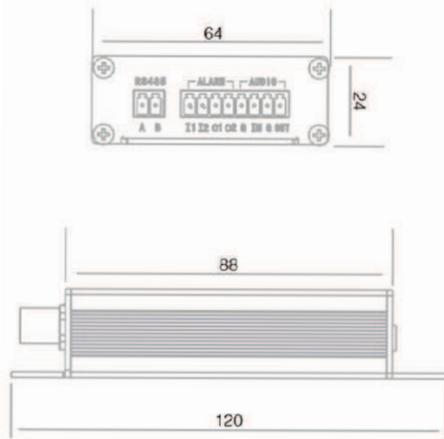

### Specifications

Model	IPA102
<b>Video</b>	
Compression	H.264
Image Resolution	D1, CIF, QCIF
Frame Rate	1 ~ 25fps
Bitrate	64kbps ~ 4Mbps
<b>Audio</b>	
Compression	G.711 / ADPCM
Bitrate	32kbps ~ 64kbps
<b>Network</b>	
Network Protocols Supported	TCP/IP, ARP, ICMP, FTP, DNS/DDNS, RTP/RTCP, RTSP, PPPoE, FTP, NTP, SNMP
User Interface	Web
<b>Interfaces</b>	
Ethernet	10/100M, RJ45 interface
Audio In / Out	1 x Line in / 1 x Line out
Control	1 x RS485
Alarm In / Out	1 x Input / 1 x Output
Video In	1 x BNC
Memory Slot	TF card slot
<b>Environmental</b>	
Operating Temperature	-20°C ~ 60°C / -4°F ~ 140°F
Operating Humidity	10% ~ 90%
<b>Electrical</b>	
Power	12V DC
Power Consumption	Max. 4W
<b>Mechanical</b>	
Weight	0.2kg / 0.54lb (Gross Weight)
Dimensions	120 x 64 x 24mm / 4.72" x 2.52" x 0.94"

IR BULLET CAMERA

BOX CAMERA

SEMI DOME CAMERA

SPEED DOME CAMERA

IR SPEED DOME CAMERA

PTZ CAMERA

TRACKING SYSTEM

NETWORK VIDEO RECORDER

VIDEO MANAGEMENT SYSTEM

IP SAN

ENCODER & DECODER

MOBILE SOLUTIONS