




SAH725



SAB754

### Features

- Waterproof complies with the IP66 standard
- Side opening, easy to install camera
- Die-cast aluminium, resistant to impacts
- 25 kg (55lb.) load rating
- Easy installation
- Resistant to salt damage
- Sturdy joint
- Internal cable management
- 6mm tempered glass cover
- Available accessories: sunshield, heater, camera power supply and blower

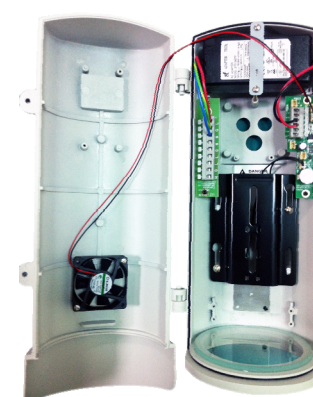

<Side Open>

### Specifications

| Model Name            | SAH725                       |                          |                  |                          | SAB754          |
|-----------------------|------------------------------|--------------------------|------------------|--------------------------|-----------------|
| Construction          | Aluminum                     |                          |                  |                          | Aluminum        |
| Color                 | White                        |                          |                  |                          | White           |
| Dimensions (WxHxD) mm | 422 x 174 x 145              |                          |                  |                          | 172 x 144 x 114 |
| Weight                | 2300g                        |                          |                  |                          | 600g            |
| Power Consumption     | --                           | 25W (MAX.)               | 25W (MAX.)       | 30W (MAX.)               |                 |
| Environment           |                              |                          |                  |                          |                 |
| Operating temperature | -40°C (-40°F) ~ 50°C (122°F) |                          |                  |                          |                 |
| Operating humidity    | 90% RH (max)                 |                          |                  |                          |                 |
| Storage temperature   | -40°C (-40°F) ~ 60°C (140°F) |                          |                  |                          |                 |
| Power                 | NO                           | AC24V                    | AC230V           | AC90~260V                |                 |
| Ordering Information  | SAH725+SAB754                | SAH725HB-2 +SAB754       | SAH725H-7+SAB754 | SAH725HB-7+SAB754        |                 |
|                       |                              | Heater & blower included | Heater included  | Heater & blower included |                 |

