

ISCOM HT801-GSFP GPON Stick

▼ Introduction

ISCOM HT801-GSFP is a GPON ONT stick in an SFP form factor that can be integrated with a GPON ONU MAC. It can be inserted into any SFP interface in an Ethernet switch, IP camera, LTE small cell, router, DSLAM, or other device. This allows the original network to operate as a PON network with minimal complexity in network reconstruction. Additional benefits are lower power consumption and cost, and improved network reliability.



ISCOM HT801-GSFP

▼ Highlights

- SFP form, small size, elegant appearance, and light weight
- Compliance with ITU-T G.984/G.988 and China communication industrial standards
- Low cost high effectiveness for network transformation to PON, suitable for large-scale applications
- Tested full interoperability with any OLT by any vendors

International Headquarters


East-11, Raisecom Building, No.10 Xibeiwang East Road,
Haidian District, Beijing, 100094, China
Tel: +86 10 8288 3305
Fax: +86 10 8288 3056
www.raisecom.com

U.S.A. Headquarters


Address: 3031 N. Rocky Point Drive West Suite 100
Tampa, Florida 33607 USA
Tel: 1-888-816-4808
Email: sales@raisecominc.com

Raisecom Technology Co., Ltd.


Copyright@1999-2016
All rights reserved
Technical information is subjected
to change without notice

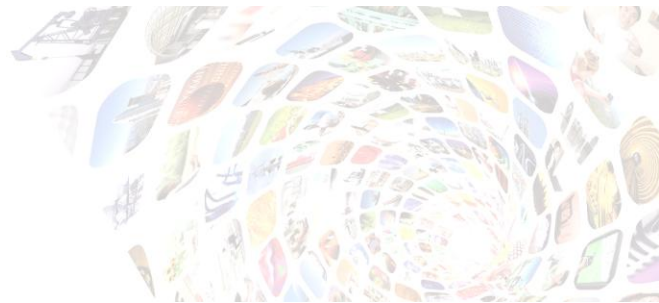

▼ Typical application

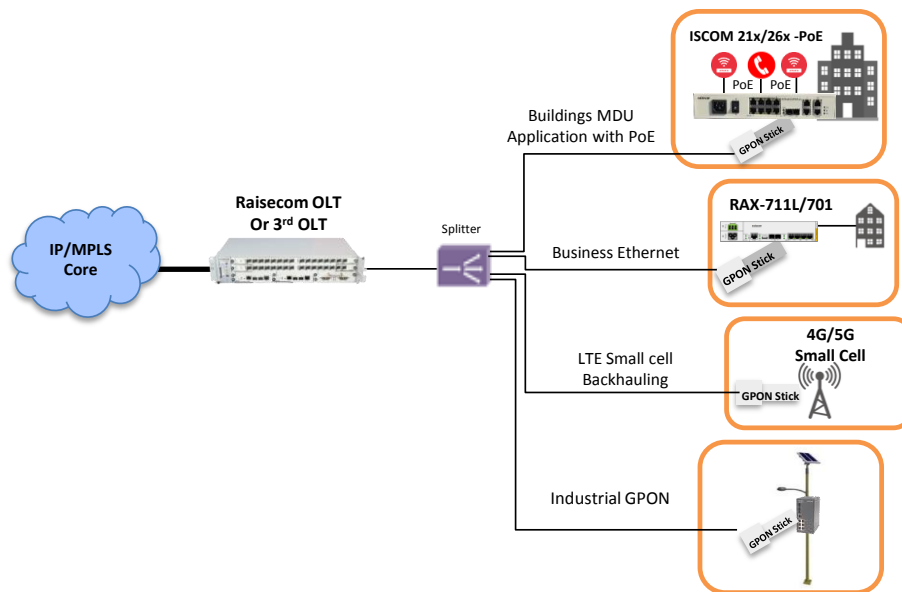

- GPON stick provides a pluggable GPON interface for FTTx , business and wireless backhaul applications in a compact form factor and lower power consumption.
- Can be plugged into Raisecom' s (or 3rd party) : L2/L3 switch , Eth EDD/PTN, Industrial Ethernet Switches with standard SFP or directly plugged into LTE Small Cell to assure minimal down time
- Offering various type of applications:
 - ◆ Building MDU's with PoE (plugged into ISCOM 21xx/26xx –PWR)
 - ◆ Business Ethernet services over GPON (plugged into RAX-711L/701)
 - ◆ LTE small cell backhaul over GPON
 - ◆ Industrial GPON (plugged into Gazelle Switches)
- Interop with Raisecom OLT's or 3rd OLT

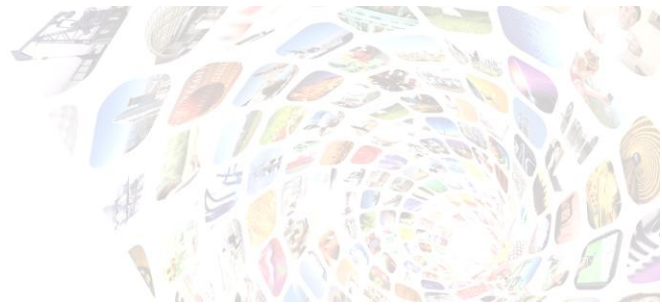

▼ Specifications

Physical features	
Dimensions	Standard SFP form
Maximum overall power consumption	< 2.5 W
Operating temperature	Industrial level: -40 to 85°C (shell temperature)
Operating humidity (RH)	5%–80% (non-condensing)
Altitude	≤ 5000 m
Software features	
PON	<ul style="list-style-type: none"> 8 T-CONT interfaces and 32 GEM interfaces Multiple authentication modes (SN, Password, LOID, etc.) AES-128 encryption
MAC address	<ul style="list-style-type: none"> Up to 256 entries in the MAC address table Storm control over DLF packets, unknown multicast packets, and broadcast packets
VLAN	<ul style="list-style-type: none"> IEEE 802.1Q CTC VLAN mode (transparent transmission, tag, translation, and Trunk)
QoS/ACL	<ul style="list-style-type: none"> Matching Layer 2 traffic classification with different fields, such as the destination MAC address, source MAC address, VLAN ID, and CoS Matching Layer 3 traffic classification with different fields, such as the destination IP address, source IP address, and IP type Configuring the action for QoS or ACL traffic classification Priority scheduling in SP, WRR, WDRR, etc. mode
Multicast	IGMP Snooping
Maintenance and management	<ul style="list-style-type: none"> OMCI management and configuration, in compliance with G.984.4/G.988 and China Telecom GPON technical specifications OLT or Web management Interface Up/Down and power failure alarms Configuring thresholds of optical module parameters and querying the current value
Interface indexes	
GPON interface	<ul style="list-style-type: none"> Class B+ Interface type (SMF): PON interface, in SC/PC form

International Headquarters

East-11, Raisecom Building, No.10 Xibeiwang East Road,
Haidian District, Beijing, 100094, China
Tel: +86 10 8288 3305
Fax: +86 10 8288 3056
www.raisecom.com

U.S.A. Headquarters

Address: 3031 N. Rocky Point Drive West Suite 100
Tampa, Florida 33607 USA
Tel: 1-888-816-4808
Email: sales@raisecominc.com

Raisecom Technology Co., Ltd.

Copyright©1999-2016
All rights reserved
Technical information is subjected to change without notice



	<ul style="list-style-type: none">• Transmission rate: 1.25 Gbit/s in the uplink and 2.5 Gbit/s in the downlink• Central wavelength: 1310 nm for Tx and 1490 nm for Rx• Receiving sensitivity: -28 dBm• Minimum overload:-8 dBm
--	--

Ordering information

Model	Version	Description
ISCOM HT801-GSFP	T.00(RC01)	GPON Stick(GPON ONU MAC, SFP, SC/PC), ITU-T 984 CLASS B+, industrial grade.

International Headquarters

East-11, Raisecom Building, No.10 Xibeiwang East Road,
Haidian District, Beijing, 100094, China
Tel: +86 10 8288 3305
Fax: +86 10 8288 3056
www.raisecom.com

U.S.A. Headquarters

Address: 3031 N. Rocky Point Drive West Suite 100
Tampa, Florida 33607 USA
Tel: 1-888-816-4808
Email: sales@raisecominc.com

Raisecom Technology Co., Ltd.

Copyright@1999-2016
All rights reserved
Technical information is subjected
to change without notice