

FD920

3MP fixed dome, 3-9 mm motorized, H.265/H.264/MJPEG, SFP

Quick Start Guide



Find the latest information, firmware and documentation at:
siqura.com



Unpack



Note 1: Subject to modification. Actual product and accessories may differ in appearance.

Installation notices



CAUTION:

INSTALLATION SHALL BE PERFORMED BY QUALIFIED PERSONNEL ONLY.

CONNECT POE TO UNEXPOSED NETWORKS.

INSTALLATION SHALL BE IN ACCORDANCE WITH LOCAL PROCEDURES.

THE CAMERA CONTAINS IRREPLACEBLE BATTERIES, DISPOSE OF THE CAMERA IN ACCORDANCE WITH LOCAL REGULATIONS.

IF YOU USE AN EXTERNAL POWER SUPPLY, CONTACT SIQURA TO MAKE SURE THAT THE POWER SUPPLY HAS THE PROPER POWER SPECIFICATIONS.

Connectors


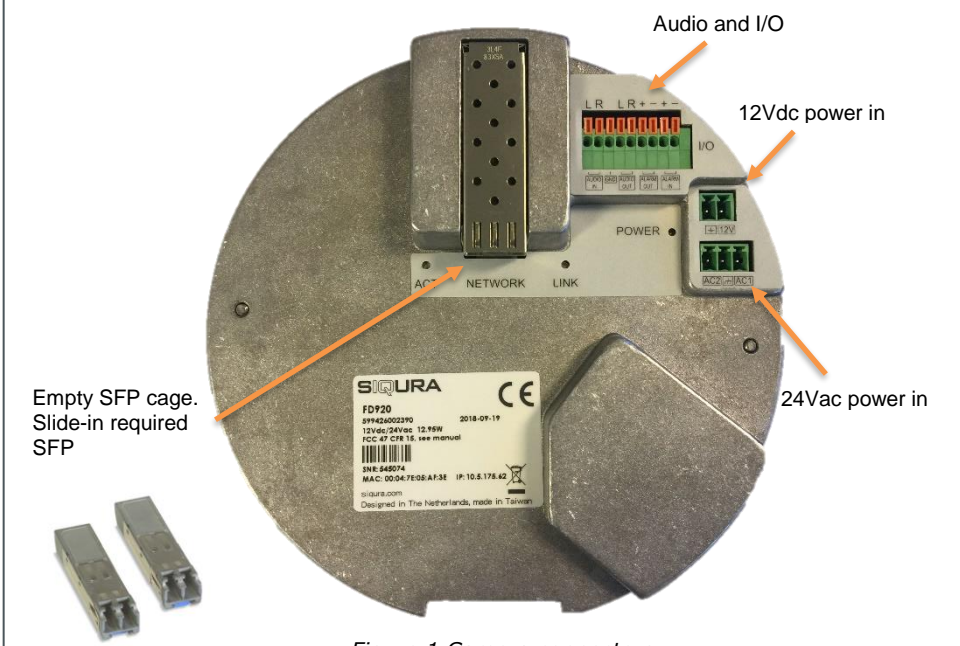



Figure 1 Camera connectors

Connectors and reset button

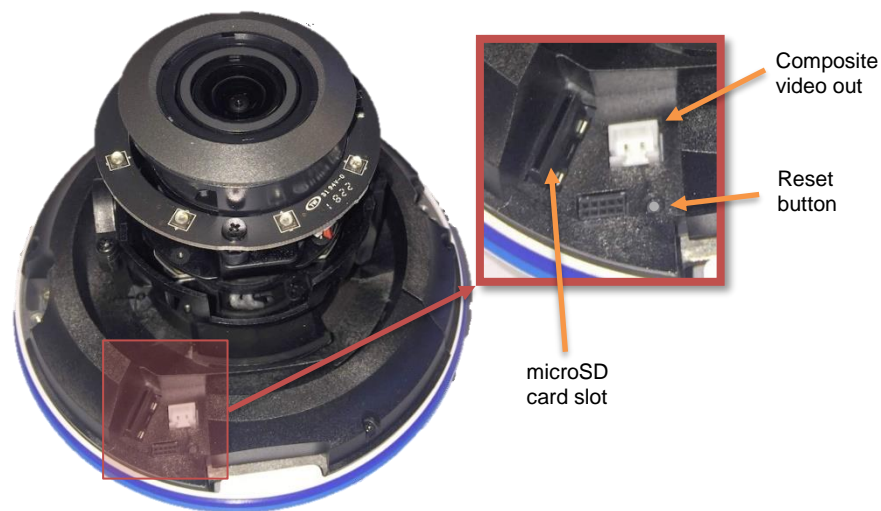

NOTE: IT IS NOT RECOMMENDED TO CONTINUOUSLY (24/7) RECORD ON THE MICRO SD CARD, AS THE CARD MAY NOT SUPPORT LONG-TERM CONTINUOUS DATA READ/WRITE. CONTACT THE MANUFACTURER OF THE MICRO SD CARD FOR INFORMATION ABOUT THE CARD'S RELIABILITY AND LIFE EXPECTANCY.

Camera mounting

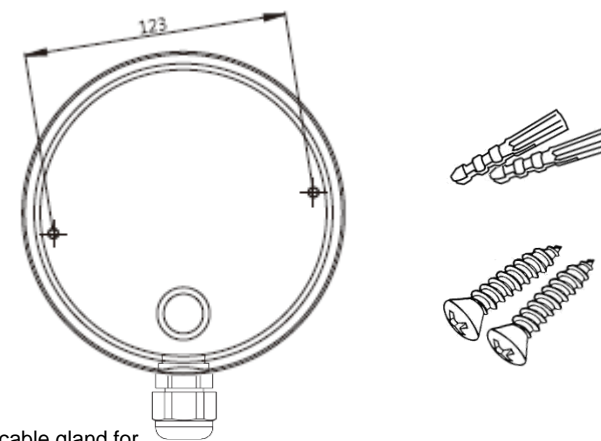


Use the cable gland for IP66/67 wiring






Mount the camera on a hard surface with the delivered screws. The surface shall be able to hold at least 5 kg

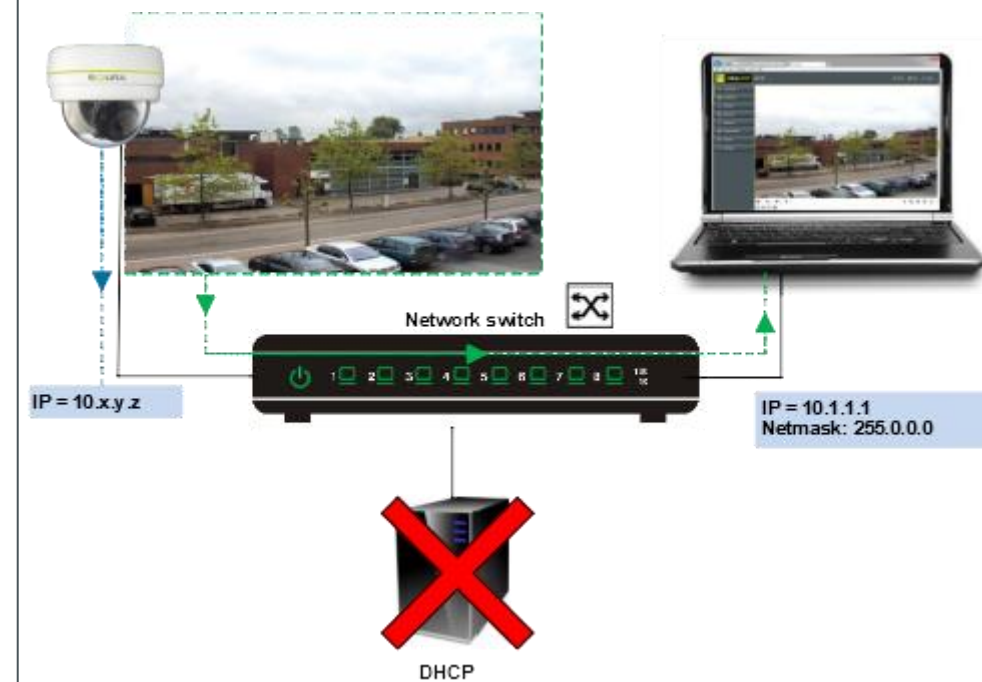Accessing the camera



Auto-detect with SDM2

1  siqura.com/downloads/software

2  

SDM2-vx.xx-setup.zip

1st time camera login

1 Admin 1234

2 Set a strong password

qwerty1234 ❌

x6W@oM0a!9#F ✅

Install browser-based viewer

3 x6W@oM0a!9#F

4

Internet Explorer 11

Microsoft Edge

Set OCX Protocol

SIQURA Home System Streaming Camera Logout

Video Configuration

Video OCX Protocol

Video OCX protocol setting :

- RTP over UDP
- RTP over RTSP(TCP)
- RTSP over HTTP
- MJPEG over HTTP
- Multicast mode

Multicast Stream 1 Video Address	0.0.0.0	Port 0	TTL 1
Multicast Stream 2 Video Address	0.0.0.0	Port 0	TTL 1
Multicast Stream 3 Video Address	0.0.0.0	Port 0	TTL 1
Multicast Stream 4 Video Address	0.0.0.0	Port 0	TTL 1
Multicast Stream Audio Address	0.0.0.0	Port 0	TTL 1

Save

Note:

If the IE web interface is not showing video you might need to open your firewall or set the OCX protocol to RTP-over-RTSP(TCP)

Using the Web Viewer

SIQURA Home System Streaming Camera Logout English

Stream 1

2016/04/01 03:02

ZOOM WIDE TELE 1 step RESET

FOCUS NEAR FAR 1 step RESET

AF Mode MANUAL ZM TRIG PUSH AF

Stream1 MJPEG bitrate : low compression, high quality
Stream2 H264 bitrate : 4096 kbps