

ECH502

Wireless Hotspot Gateway



Product Overview

The Edgecore ECH502 is an all-in-one wireless hotspot gateway solution that caters primarily to SMBs such as coffee shops or restaurants. As an access point with built-in gateway functionality, the ECH502 is ideal for businesses that wish to have an enterprise-grade Wi-Fi network for their customers, without the associated deployment costs and complexities. Featuring concurrent dual-band 802.11ac wave 2 connectivity, 2x2:2 MU-MIMO with a total data rate of 1.2 Gbps, and many wireless optimization features, the ECH502 is able to provide a wire-like performance. Additionally, the ECH502 offers a comprehensive set of user authentication, policy enforcement, and network traffic monitoring functionality, allowing businesses to gain complete visibility and control over their Wi-Fi network.

The integrated guest Wi-Fi in the ECH502 supports a wide-array of methods for guests to authenticate and obtain Wi-Fi access. Guests can register by e-mail, SMS, or popular social media platforms such as Facebook, for additional access. Alternatively, businesses can choose to integrate an external RADIUS server to easily centralize the user credentials in an existing network environment.

With the ECH502, small business owners can move beyond just providing free Wi-Fi to their customers. Customizable captive portals and social media login are now valuable sources for obtaining direct customer information, which in turn allows for better understanding of customers and more effective marketing campaigns. Manageable Wi-Fi is increasingly becoming a necessity for SMBs that wish to offer a secure and reliable Wi-Fi environment, and the ECH502 is the ideal product to meet these needs.

Highlights

- All-in-one: Built-in Wi-Fi and user-access control
- Integrated guest Wi-Fi platform supporting Facebook, Google+, Line and OpenID
- Tiered Wi-Fi service with usage quotas by bandwidth, volume, and duration
- Detailed user browsing histories and network statistics
- 802.11ac wave 2, 2 x 2: 2 MU-MIMO supporting a total data rate of 1.2 Gbps across both radios
- Up to 4 Service Zones, each with completely customizable captive portals and network configurations
- Built-in gateway functionality including DHCP, NAT, and routing profiles


Features

Complete User Management

The ECH502 provides organizations with the same level of security as large enterprises, such as WPA2-enterprise user authentication with detailed role-based policy enforcement. Through the combination of roles, scheduling, and profiles, network administrators can control each user's bandwidth, traffic priorities, routing, and much more. Furthermore, ECH502 support numerous network logs and reporting mechanisms, such as the HTTP Web Log that records visited website histories of all users. The business owners can easily trace internal to external network addresses when illegal or suspicious activities are performed. Managing user access and user logs and reports are more important than ever for organizations needing to ensure reliable and secure Wi-Fi performance.

Easy Guest Login with Customer Insights

The ECH502 provides multiple guest self-registration methods, guests can easily login via their e-mail, or using their Facebook, Google+, Line, or OpenID accounts, while business owners can collect and use user information such as name, e-mail, gender, birthday, and location to implement more effective marketing and advertising campaigns. With these information, business owners can better understand their target audience and optimized product offerings and promotional programs, resulting in more effective campaigns and increased revenue.

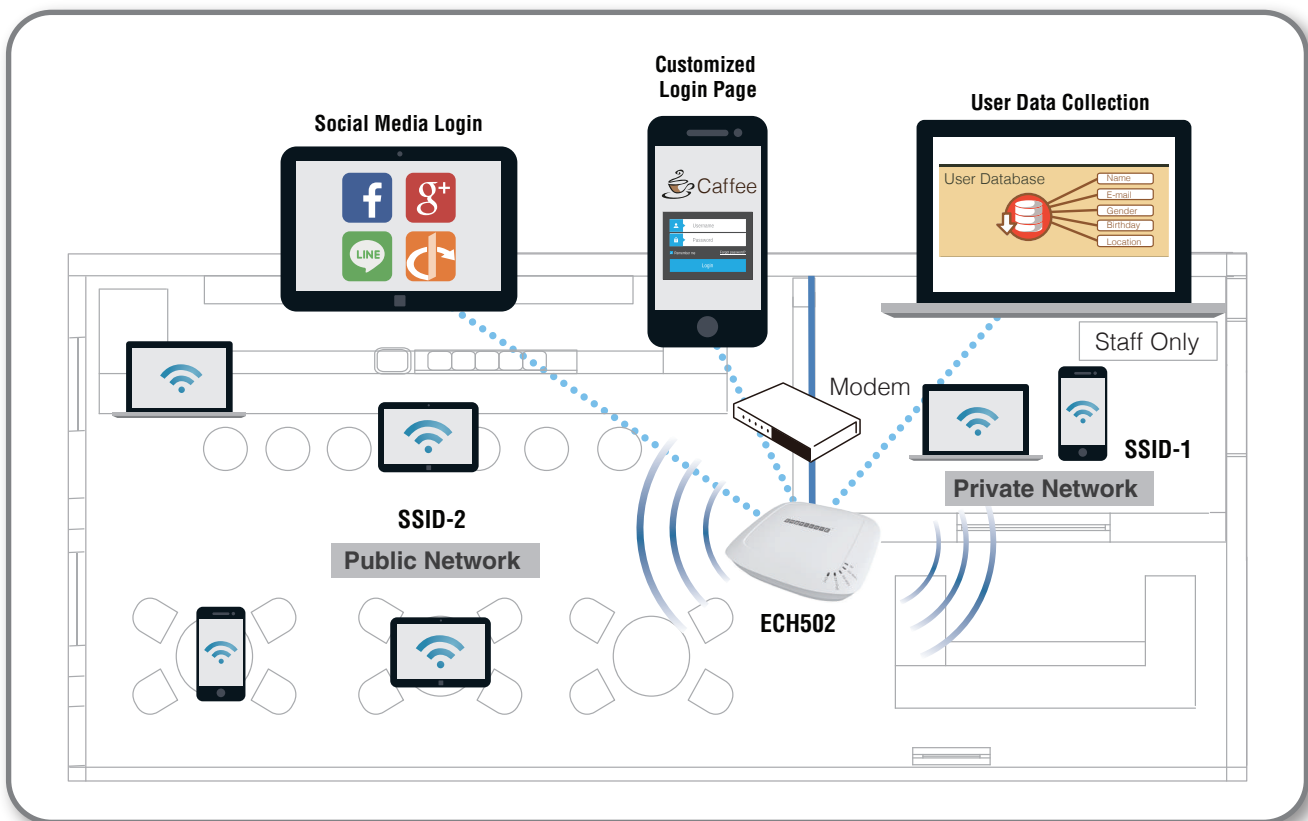

Features

Physical

Power:

- DC Input: 12 V /1.5 A
- PoE: 802.3af compliant (PoE injector optional)

Dimensions:

- 14.6 cm (L) x14.6 cm (W)x 3.5 cm (H)

Weight:

- 0.55 kg (1.21 lbs)

Interfaces:

- Uplink: 1 x 10/100/1000BASE-T Ethernet, Auto MDIX, RJ-45 with 802.3af PoE
- LAN: 1 x 10/100/1000BASE-T Ethernet, Auto MDIX, RJ-45
- USB: 1 x USB2.0; 4G LTE dongle support

LED Indicators:

- Power
- 2G-WiFi
- 5G-WiFi
- LAN

Buttons: Reset/Restart

Environmental Conditions:

- Operating Temperature: 0°C (32°F) to 50°C (122°F)
- Operating Humidity: 5% to 95% non-condensing

Power Consumption: 9.0 W max.

Antenna:

- Type: 5 x Built-in PIFA (2 x 2.4 GHz, 2 x 5 GHz, 1 x Bluetooth Low Energy)
- Gain: 3 dBi (2.4 GHz), 5 dBi (5 GHz), 3 dBi (BLE)

Mounting:

- Wall/ceiling mount (mounting bracket included)
- Tamper proof mounting kit lock

Wireless Performance

Physical Data Rate:

- Up to 300 Mbps (2.4 GHz)
- Up to 867 Mbps (5 GHz)

Wireless Security

WEP

WPA/WPA2 Mixed

WPA2-Personal (PSK)

WPA2-Enterprise (EAP)

TKIP and AES Encryption

VLAN Tagging (802.1Q)

Station Isolation

Layer 2 Firewall

DHCP Snooping

User Management

User Policy Assignment

- Role-based
- Time and location dependent

Bandwidth Limitations

Traffic Classification/Remarking: 802.1p/DSCP

Stateful Firewall: each role with individual enforcement schedules

Static Route Assignment

Concurrent Session Limit

Client Change Password Privilege:

- Allow authenticated users to modify their own login password

Wi-Fi

Standards:

- 802.11a/b/g/n/ac; wave 2
- Concurrent dual-band 2.4 and 5 GHz

Supported Data Rates:

- 802.11b: 1, 2, 5.5, 11 Mbps
- 802.11a/g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps
- 802.11n: 6.5 – 144 Mbps (20MHz)
- 802.11n: 13.5 – 300 Mbps (40MHz)
- 802.11ac: 6.5 – 173.4 Mbps (20MHz)
- 802.11ac: 13.5 – 400 Mbps (40MHz)
- 802.11ac: 29.3 – 866.6 Mbps (80MHz)

Radio Chains: 2 x 2

Spatial Streams: 2; MU-MIMO support

Output Power:

- 2.4 GHz: Up to 22 dBm*1
- 5 GHz: Up to 22 dBm*1

Channelization: 20/40/80 MHz

Frequency Band:

- 2.412 – 2.472 GHz
- 5.180 – 5.825 GHz

Operating Channels:

- 2.4 GHz: 1–11 (US), 1–13 (Europe), 1–13 (Japan)
 - 5 GHz*2: 36–165 (US), 36–140 (Europe), 36–140 (Japan)
- ESSIDs Up to 8

User Authentication

Authentication Types:

- UAM (browser-based)
- IP or MAC-based

Authentication Servers:

- Local
- On-Demand
- Guest
- RADIUS (encrypted)

Billing Quota Type:

- Duration Time
- Cut-off Time
- Volume
- Usage Time

Social Media Login:

- Facebook
- Google+
- Line
- Open ID

Customizable Captive Portal

Customizable Walled Garden

Integrated Guest Access

User Blacklisting

HTTPs Login Redirect

Network Services

Internet Protocols Supported: Static/DHCP/PPPoE

DHCP Server IPv4/IPv6

DHCP Relay

Network Address Translation

Built-in HTTP Proxy Server

Local DNS Records

*1: Maximum power is limited by local regulatory requirements

*2: Some channels are restricted by local regulatory requirements

Features

Device Mobility

Multiple DeviceLogins per Account

System Capacity

Local accounts: Up to 2,000

On-Deman accounts: Up to 2,000

System Management

Browser-Based Configuration: Administer the system from any standard web browser

Administrator Accounts:

- Multiple tiered access privileges
- Monitor each admin's current accessed page

System Time: Automatic synchronization (NTP)

System backup and restore

SNMP: v1/v2c

Network Utilities: built-inpacket capture

System and Network Status

Traffic volume reports

Online device monitoring

Active sessions list

SMTP (E-mail) notifications

Multiple concurrent E-mail notification receivers

Network Activity Logs

System log (SYSLOG)

Configuration change log

RADIUS ServerLog

Web-based user authentication log

User events log

User browsing history

Receive Sensitivity

Operating Mode	Data Rate	Receive Sensitivity (dBm)
802.11b	1 Mbps	-95
	11 Mbps	-86
802.11a	6 Mbps	-87
	54 Mbps	-70
802.11g	6 Mbps	-89
	54 Mbps	-72
802.11n (HT20)	MCS0	-88
	MCS7	-67
	MCS8	-88
	MCS15	-67
802.11n (HT40)	MCS0	-85
	MCS7	-66
	MCS8	-85
	MCS15	-66
802.11ac (VHT20)	MCS0	-86
	MCS8	-64
802.11ac (VHT40)	MCS0	-83
	MCS9	-61
802.11ac (VHT80)	MCS0	-81
	MCS9	-57

Warranty

Please check www.edge-core.com for the warranty terms in your country.

For More Information

To find out more about Edgecore Networks Corporation products and solutions, visit www.edge-core.com.

About Edgecore Networks Corporation

Edgecore Networks Corporation is in the business of providing innovative network solutions. In the service provider network, in the data center or in the cloud, Edgecore Networks Corporation delivers the software and systems that transform the way the world connects. Edgecore Networks Corporation serves customers and partners worldwide. Additional information can be found at www.edge-core.com.

Edgecore Networks Corporation is a subsidiary of Accton Technology Corporation, the leading network ODM company. The Edgecore data center switches are developed and manufactured by Accton.

To purchase Edgecore Networks solutions, please contact your Edgecore Networks Corporation representatives at +886 3 563 8888 (HQ) or +1 (949)-336-6801 or authorized resellers.

© Copyright 2018 Edgecore Networks Corporation. The information contained herein is subject to change without notice. This document is for informational purposes only and does not set forth any warranty, expressed or implied, concerning any equipment, equipment feature, or service offered by Edgecore Networks Corporation. Edgecore Networks Corporation shall not be liable for technical or editorial errors or omissions contained herein.