

# IPC2252-Gi4N-SIR50-Z7022

## 2.0MP Human Recognitive HD Network Varifocal IR Bullet



### Features

#### Excellent Image Quality

- 2.0 Megapixel 1/2.8" progressive scan CMOS sensor
- High definition and smooth picture, 1080p@30fps
- H.265 video codec, saves up to 50% bandwidth and storage
- Ultra low illumination, 0.002lux with color picture
- WDR support / 3D noise reduction / Auto Iris / HLC

#### Intelligent Functions

- Motion detection / Tampering / Guard line / Defocus / Scene change / Enter guard area / Exit guard area / Object left / Object removal / Gathering / Audio surge

#### Recognitive Functions

- Up to 100 targets simultaneously
- Target capturing and characters recognizing
- Bi-directional people counting
- Built-in picture comparison algorithm, best picture selection
- Face Intelligence Exposure

#### Integrated High Efficiency IR

- Industrial IR LED with long operational lifespan
- 30 ~ 50m IR distance
- Smart IR function


#### A Variety of Installation Modes

- Varifocal AF lens

#### Abundant Functions and Features

- Micro SD card slot, supports Automatic Network Replenishment (ANR)
- Bi-directional audio / alarm in and out / RS485
- Up to 3 Multi-stream
- PoE
- IP66

### Dimensions Units:mm

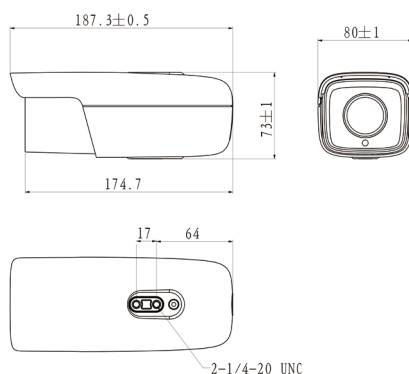

### Specifications

	IPC2252-Gi4N-SIR50-Z7022
<b>Camera</b>	
Image Sensor	1/2.8" progressive scan CMOS
Pixels	2.0 Megapixel
Min. Illumination	Color: 0.002lux @ (F1.2, AGC ON) B/W: 0.0002lux @ (F1.2, AGC ON)
Shutter Speed	1 ~ 1/30,000s
Day / Night	Auto (ICR) / Color / B/W
Wide Dynamic Range	Ultra WDR, >=120dB
S/N Ratio	>52dB
White Balance	Auto / Manual
Gain Control	Auto / Manual
Backlight Compensation	Off / BLC / WDR / HLC
<b>Lens</b>	
Mount Type	Ø14
Auto Iris	DC drive
Focal Length	-Z7022: 7~22mm @ F1.4 motorized varifocal lens
Focus Control	Manual / Semi-Automatic / Auto
<b>Infrared</b>	
IR Distance	30 ~ 50m
IR Intensity	Smart IR
<b>Video</b>	
Compression	H.265 / H.264 / MJPEG
Image Resolution	Main stream: 1080p Secondary stream: D1
Frame Rate	Main stream: 1080p@30fps Secondary stream: D1@30fps
Bitrate	32kbps ~ 16Mbps
Bitrate Control	VBR / CBR
Multi-stream	Supported
Caption	Date and time / Alarm / Customized
Privacy Masking	Up to 4 zones
Motion Detection	Up to 4 zones
Video Freeze	Supported
Digital Noise Reduction	3D noise reduction
Image Flip	Flip / Mirror / Rotation at 90°, 180°, 270°
<b>Audio</b>	
Compression	G.711a / G.711u / ADPCM / G.722 / AAC-LC / G.722.1c / G.726
Bitrate	32kbps ~ 64kbps
Audio Function	Bi-directional audio / AEC / Mixed audio recording / Dumb / Mute
<b>Network</b>	
Network Protocols	TCP/IP, UDP, HTTP, DHCP, DNS/DDNS, RTP/RTCP, RTSP, PPPoE, FTP, VSIP, UPnP, 802.1x, NAT, QoS, SMTP, IPv4, IPv6 (optional)
User Interface	IPC Control (IE, Firefox, Chrome)
Max. User Access	Max. 10 Users (includes 2 internal)
Application Programming	ONVIF (Profile S, Profile G), GB/T 28181-2011, API, CGI
Automatic Network Replenishment (ANR)	Supported
<b>Recognitive Functions</b>	
Target Detection	Person, Face Up to 100 targets simultaneously
Captured Picture	Person, Face, Full view Built-in picture comparison algorithm, best picture selection
Target Characters	Direction / Speed level
People Counting	Bi-directional
Face Enhancement	Face Intelligence Exposure
<b>Alarm</b>	
Alarm Triggers	Alarm input / Network disconnect / Disk full / Disk error Motion detection / Tampering / Guard line / Defocus / Scene change / Enter guard area / Exit guard area / Object left / Object removal / Gathering / Audio surge
Intelligent	Alarm report / Recording / Text overlay / Snapshot / External output / Email notice / Acoustic alarm
Alarm Events	
<b>Interfaces</b>	
Ethernet	10/100M, RJ45 interface
Audio In / Out	1 x Line in / 1 x Line out
Control	1 x RS485
Alarm In / Out	1 x Input / 1 x Output
Memory Slot	Micro SD card slot, supports up to 128GB
<b>Environmental</b>	
Operating Temperature	-40°C ~ 70°C / -40°F ~ 158°F
Operating Humidity	10% ~ 95%
Protection Level	IP66
<b>Electrical</b>	
Power	AC24V ± 10% / DC12V ± 10% / PoE (IEEE802.3at)
Power Consumption	Max. 20W
<b>Mechanical</b>	
Weight	1 kg / 2.2lb (Gross Weight)
Dimensions	181.5 x 80 x 73mm / 7.15" x 3.15" x 2.87"